


PIN OUT

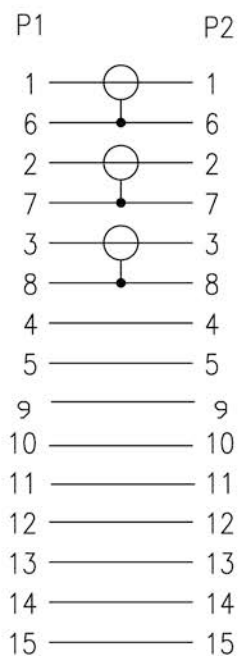

SHELL DRAIN SHELL

CONDUCTOR OF COAX ○
SHIELD OF COAX ●

ITEM NO.	L (LENGTH)
	m
26-0150MM	15.0
26-0200MM	20.0
26-0250MM	25.0
26-0300MM	30.0
26-0500MM	50.0

4	SCREWS	4-40UNC, 2.3 X 45.5MM	4	PCS
3	FERRITE	F5B: RH14.2 X 28.5 X 9.5	2	PCS
2	HDB15 MALE	BLUE INSULATION, NICKEL PLATED SHELL, GOLD PLATED PIN)	2	PCS
1	CABLE	(1C X 28# + D + AL) X 3C + 9C X 28# + AL + D + B, OD: 8.0MM BLACK	L	M
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT

Itemref	Quantity	Title/Name, designation, material, dimension etc			Article No./Reference	
Designed by		Checked by	Approved by - date MARCH 9,2012	File name SVGA Cables	Date MARCH 9,2012	Scale FREE
				26-0150/200/250/300/500MM		
				26-0150/200/250/300/500MM	Edition 1	Sheet 1/1